


# Nexans Energy U.S.A.

## Building Wire Products

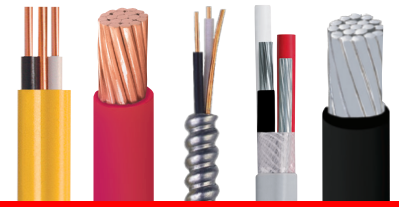


<p><b><u>ENERGEX® THHN</u></b>  <b>THHN / THWN-2</b>  feeder and branch circuits  <b>INSTAGLIDE® Slippery</b></p>	<ul style="list-style-type: none"> <li>• 14 AWG – 750 kcmil</li> <li>• THWN-2 90°C</li> <li>• INSTAGLIDE® Slippery - 6 AWG and larger</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Color feeder sizes in stock</li> <li>• Rated CT – 1/0 AWG and larger</li> <li>• Bar coded coils and reels</li> </ul>
<p><b><u>ENERGEX® NM-B</u></b>  <b>NM-B</b>  residential building wire</p>	<ul style="list-style-type: none"> <li>• 2C 14 AWG – 3C 2 AWG</li> <li>• 2+2 conductor available</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Slick jacket means easy installation</li> <li>• Color-coded jackets</li> <li>• Bar coded coils and reels</li> </ul>
<p><b><u>ENERGEX® UF-B</u></b>  <b>UF-B</b>  underground feeder</p>	<ul style="list-style-type: none"> <li>• 2C 14 AWG – 3C 6 AWG</li> <li>• Gray jacket</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Slick jacket means easy installation</li> <li>• Color-coded jackets</li> <li>• Bar coded coils and reels</li> </ul>
<p><b><u>ENERGEX® XHHW</u></b>  <b>XHHW</b>  feeder and branch circuits  <b>INSTAGLIDE® Slippery</b></p>	<ul style="list-style-type: none"> <li>• 14 AWG – 1000 kcmil</li> <li>• Copper and aluminum</li> <li>• Solid and stranded</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Colored circuit sizes</li> <li>• Sunlight resistant 8 AWG and larger</li> <li>• Bar coded coils and reels</li> <li>• INSTAGLIDE® Slippery - 6 AWG and larger, copper only</li> </ul>
<p><b><u>ENERGEX® TFFN</u></b>  <b>TFFN</b>  fixture and appliance wire</p>	<ul style="list-style-type: none"> <li>• 18 AWG – 16 AWG</li> <li>• Solid and stranded</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Stocked in 500' and 2500' put-ups</li> <li>• Available in 11 colors</li> <li>• Bar coded coils and reels</li> </ul>
<p><b><u>ENERGEX® MC &amp; AC</u></b></p>	<ul style="list-style-type: none"> <li>• MC 120 volt</li> <li>• MC 277 volt</li> <li>• MC feeder – aluminum conductors</li> <li>• AC HCF – Green Armor</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Interlocked aluminum armor</li> <li>• Unjacketed coils and reels</li> <li>• Bar coded coils and reels</li> </ul>
<p><b><u>ENERGEX® 8000</u></b>  aluminum building wire</p>	<ul style="list-style-type: none"> <li>• Service Entrance Style R (SER)</li> <li>• Service Entrance Style U (SEU)</li> <li>• URD - UL secondary distribution</li> <li>• MHF - mobile home feeder</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Solid color coding</li> <li>• Sequential foot marking</li> <li>• Flexible stranding</li> <li>• Bar coded coils and reels</li> </ul>
<p><b><u>Bare Copper</u></b></p>	<ul style="list-style-type: none"> <li>• Soft drawn bare copper</li> <li>• 8 AWG – 4/0 AWG</li> <li>• ASTM B8</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Stocked in the popular distributor packages</li> <li>• Bar coded packaging</li> </ul>
<p><b><u>Installation Accessories &amp; Services</u></b></p>	<ul style="list-style-type: none"> <li>• Pulling Eyes</li> <li>• Cutting and Paralleling</li> </ul>	<ul style="list-style-type: none"> <li>• Rectorsal Pulling Eye</li> <li>• Custom cuts to order</li> </ul>

All cables are lead free – RoHS compliant

Tel: 1-866-663-9267 | Fax: 845-469-9935 | [www.nexans.us](http://www.nexans.us)  
25 Oakland Avenue, Chester, N.Y. 10918

# Nexans Energy U.S.A.

## Industrial Wire Products

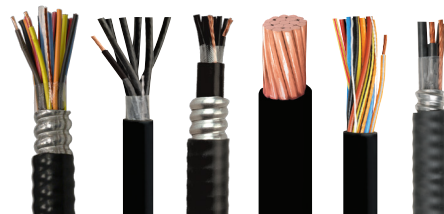

<p><b>ULTREX® VN</b> UL Type TC-ER 600 V Unarmored Tray Cables</p>	<ul style="list-style-type: none"> <li>• ER rated</li> <li>• PVC/Nylon Insulation</li> <li>• PVC Jacket</li> <li>• Shielded or unshielded</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Sequential foot marking</li> <li>• Ripcord under jacket</li> <li>• Sunlight and moisture resistant</li> <li>• FT4</li> <li>• -25°C cold bend</li> </ul>
<p><b>ULTREX® XL</b> UL Type TC-ER 600 V Unarmored Tray Cables</p>	<ul style="list-style-type: none"> <li>• ER rated</li> <li>• XLPE Insulation</li> <li>• PVC Jacket</li> <li>• Unshielded</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Sequential foot marking</li> <li>• Sunlight and moisture resistant</li> <li>• FT4 and ICEA T-29-520 at 210,000 BTU/hr</li> <li>• -25°C cold bend</li> </ul>
<p><b>Instrumentation</b> Pair or Triad configurations</p>	<ul style="list-style-type: none"> <li>• 300 V – UL Type PLTC and TC (PVC Insulated)</li> <li>• 600 V – UL Type TC</li> <li>• PVC/Nylon Insulated</li> <li>• Shielded or unshielded</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Pairs/triads</li> <li>• Overall shield</li> </ul>
<p><b>PV/RHH/RHW-2/USE-2</b> Photovoltaic (Solar) Cable</p>	<ul style="list-style-type: none"> <li>• UL Type PV rated 600 V, 1 kV, or 2 kV</li> <li>• UL Types RHH and RHW-2 rated 600 V or 2 kV</li> <li>• UL Type USE-2 rated 600 V</li> <li>• XLPE Insulation</li> <li>• Aluminum or Copper Conductors</li> </ul>	<ul style="list-style-type: none"> <li>• Sunlight resistant, black and colors</li> <li>• 1/0 AWG and larger rated CT use</li> </ul>
<p><b>CORFLEX®</b> Continuously Corrugated Aluminum Sheathed Armor</p>	<ul style="list-style-type: none"> <li>• PL – 300 V Instrumentation</li> <li>• MC – 600 V Instrumentation, Power and Control</li> <li>• MV-105 – 5 kV to 15 kV EPR</li> <li>• VFD 600 V, 3 conductor with 3 bare equipment grounds</li> <li>• In stock (except MV-105)</li> </ul>	<ul style="list-style-type: none"> <li>• Continuously corrugated and welded aluminum armor</li> <li>• Marine Shipboard UL 1309 and IEEE 1580 (except 300 V)</li> <li>• HL approved (except 300 V)</li> </ul>
<p><b>FIREX®</b> Interlocked Armor</p>	<ul style="list-style-type: none"> <li>• FIREX® MC – UL listed, 600 V</li> <li>• NORTECK® UL/CSA type MC/TECK 14, 12 &amp; 10 AWG Multi-conductor</li> <li>• XLPE insulation, aluminum armor PVC jacket</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Interlocking aluminum armor</li> <li>• Overall PVC jacket</li> <li>• FT4</li> </ul>
<p><b>TECK90</b> Interlocked Armor</p>	<ul style="list-style-type: none"> <li>• TECK90 – CSA certified</li> <li>• 600 V to 5 kV (unshielded)</li> <li>• Sunlight resistant inner PVC jacket</li> <li>• In stock</li> </ul>	<ul style="list-style-type: none"> <li>• Interlocking aluminum armor</li> <li>• Sunlight resistant overall PVC jacket</li> <li>• FT4</li> </ul>

All cables are lead free – RoHS compliant (except CORFLEX® MV-105)

Tel: 1-866-663-9267 | Fax: 845-469-9935 | [www.nexans.us](http://www.nexans.us)  
25 Oakland Avenue, Chester, N.Y. 10918